

NT1-A

The World's Quietest Studio Condenser Microphone

AUSTRALIA
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664



Features


- Large 1" (25mm) capsule with gold plated diaphragm
- Cardioid polar pattern
- Self noise of only 5dB (A)
- Ultra low noise, transformerless surface mount circuitry
- Wide dynamic range
- Gold plated output contacts
- True condenser (externally biased)
- Internal capsule shock mounting
- Designed and manufactured in Australia
- Free 10 year extended warranty when you register online at www.rodemic.com/warranty

Specifications


| | |
|---------------------|--|
| Acoustic Principle | Pressure gradient |
| Directional Pattern | Cardioid |
| Frequency Range | 20 Hz-20 kHz |
| Sensitivity | -32 dB re 1 Volt/Pascal (25 mV @ 94 dB SPL) +/- 2 dB @ 1kHz |
| Output Impedence | 100Ω |
| Dimensions | Length - 190mm (7.480") Diameter - 50mm (1.968") |
| Output Connection | 3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground) |
| Shipping Weight | 780gm |
| Net Weight | 326g |

Incl. Accessories


- SM6 Shock mount with integrated popshield
- 6m (20') high quality XLR cable
- Microphone dust cover
- NT1-A 'Studio Secrets' DVD

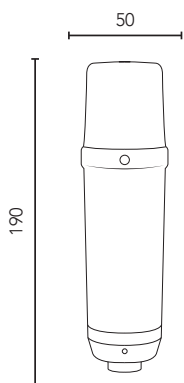

Polar Pattern



Frequency Response

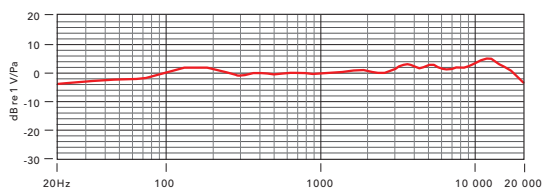

RØDE
MICROPHONES